


# Vacuum Metal Sheet Lifter serie F10A 2000



## Technical specification

|                  |   |
|------------------|---|
| Application      | Metal sheet, stainless steel, aluminum, plastic panels  |
| Lifting capacity | 2000 kg   |
| Suction pads     | No. 10 suction pads in vulcanized rubber, diameter 310 mm<br>Suction pads with spring supports<br>Exclusion of suction pads by cross arm                            |
| Frame            | Steel frame structure fixed in horizontal position<br>The suction pads are distributed on three cross arms<br>Adjustable position of suction pads and of cross arms |
| Operating system | Compressed air  |
| Vacuum system    | Vacuum circuit with vacuum reservoir, non-return valve, vacuum filter   |
| Safety systems   | Vacuum gauge with colored scale<br>Audio visual low vacuum warning powered independently and with back up battery   |
| Weight of lifter | Depends on the configuration  |
| Command          | Suction and release by slide valve command with safety system   |

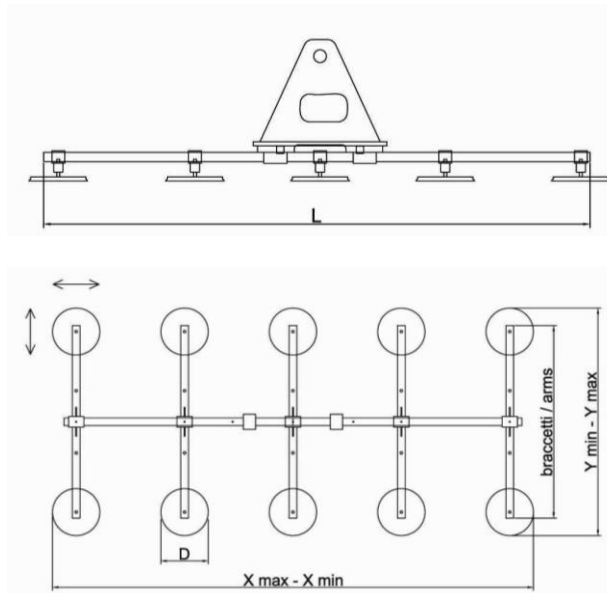

- Compressed air operating
- 10 suction pad d.310 mm
- fixed frame for horizontal lifting
- lifting capacity 2000 kg
- Safety devices

## Available models

| Pads |     | Capacity | L    | Arms |      | X (mm) |      | Y (mm) |      | Product Code         |
|------|-----|----------|------|------|------|--------|------|--------|------|----------------------|
| nr.  | ∅   | kg       | mm   | nr.  | mm   | min*   | max  | min    | max  |                      |
| 10   | 310 | 2000     | 3000 | 5    | 1270 | 2450*  | 3150 | 720    | 1500 | F10A2000/3-3000/1270 |
|      |     |          | 4000 | 5    | 1270 | 2450*  | 4150 | 720    | 1500 | F10A2000/3-4000/1270 |

\* min quote working with only 6 pads and excluding two external arms : 1170 mm

