



# Vacuum lifter

## series VB4+8 RCEBE d4 1500kg



### Specifiche tecniche

Application	Glass panels
Lifting capacity	max 600 / 1500 kg
Suuction pads	No. 12 suction pads, diameter 390mm Lipped pads with safety ring Pads with internal spring system 4 fixed pads on the frame, 8 pads on removable arms
Pad spread	External pads on removable pad arms 4 pads configuration mm 1020 x 800 6 pads configuration mm 1750 x 800 8 pads configuration mm 1750 x 1350 12 pads configuration mm 2250 x 1600
Load movement	Continues electric 360° rotation Electric tilt 0-90°
Operating system	DC vacuum pump powered from on-board batteries high capacity re-chargeable batteries battery status indicator economizer for reduction of the energy consumption
Vacuum system	2 independent vacuum circuits, each vacuum circuit with vacuum reserve and non return valve
Weight of lifter	Kg 223
Structural depth	mm 670
Control	Radio remote control Release of the load by dual action security command
Standard features	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit Battery charger 240 Volt Vacuum filter

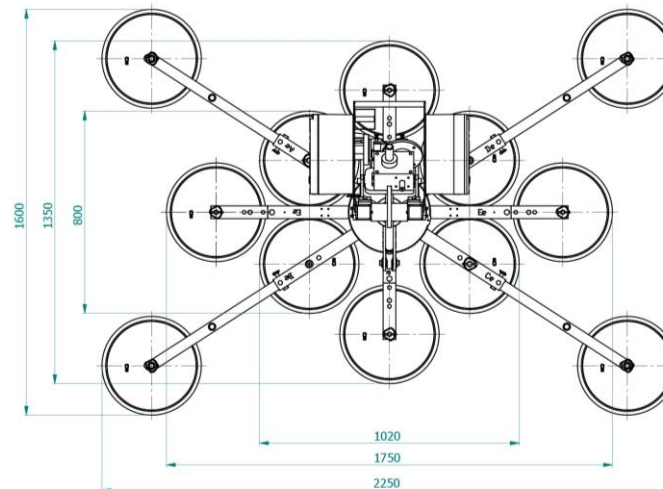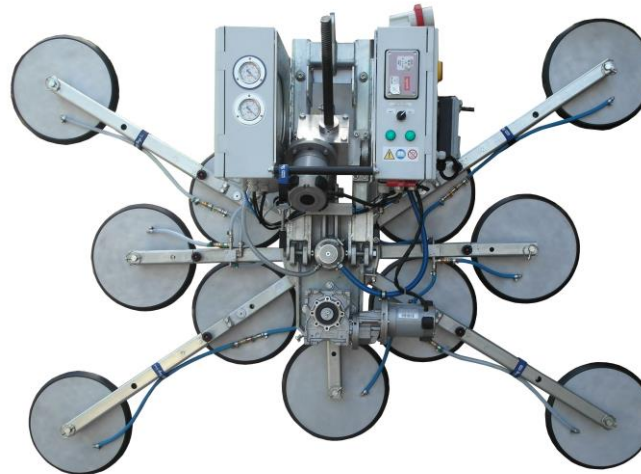

#### • battery operating system

- Nr.12 suction pads Ø 390 mm
- Lifting capacity max 1500 kg
- Electric continues rotation 360°
- Electric tilt 0-90°

- Safety devices
- **Modular frame**
- **Radio remote control**

✓ **Dual vacuum circuit built to EN13155 standard**